
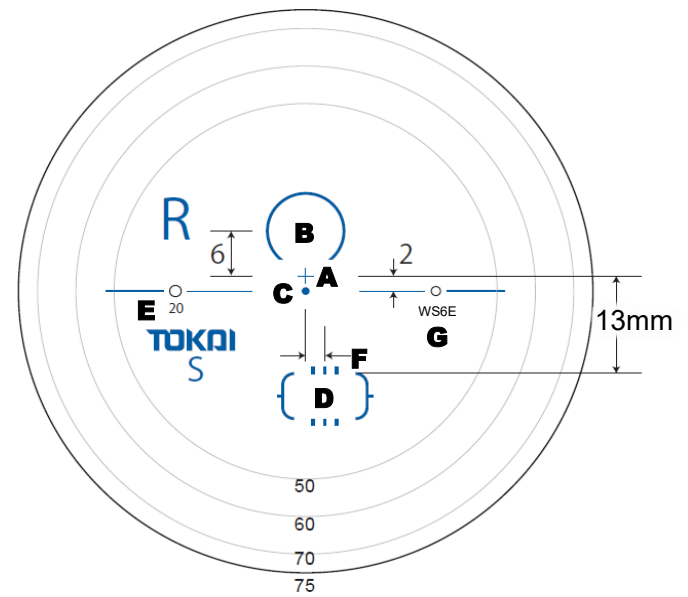


EASYONE WS

※In case of with prism, the lens may be a cataract lens depending on the power

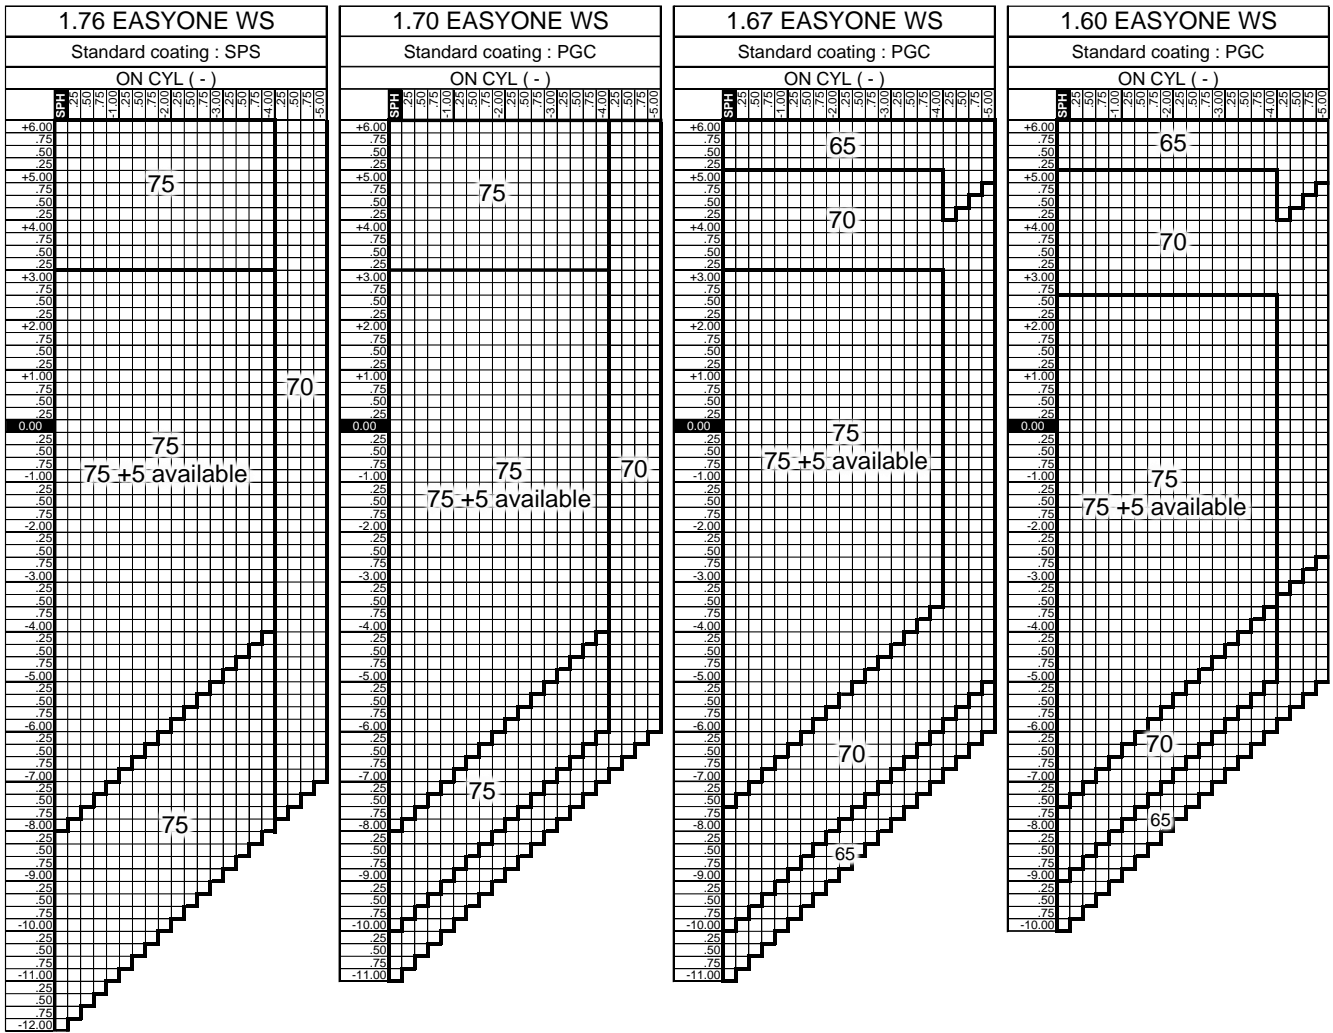

Specifications	Specifiable range / Availability
Size reduction	by 50mm Min : only (+), 1mm step
Prism	Up to 3 prism
Decentration	Not available
Base curve selection	Available (Please refer "Curve" page)
Color	Available (Please refer "available color list")
Corridor	11,12,13mm
Addition	0.50D to 4.00D at 0.25 steps
Inset	0.0 to 5.0 mm at 0.1 mm steps
Inset design from other elements	Designed by far PD, power, reading distance,
Reading distance can be prescribed	25cm to 80cm at 1cm steps
Wrap angle (Default value: 0.0°)	0.0° ~ 15.0° (0.1°steps)
Slice (Frame shape required)	Available for plus & mixed power lenses
Remote edging	Available (Wrap angle more than 11° is not available, Base curve more than 6 in minus range is not available.)
Fine edge processing	Available (Less S+C = -3.00 : Not available) Depending on direction of AXIS or design type, it may not be possible to manufacture.

Product mark	Corridor	Index	Design
W	N 11mm	Z 1.76	E
	T 12mm	7 1.70	
	S 13mm	U 1.67	
		6 1.60	

Lens mark	
A	Fitting point (far vision eye point)
B	Area to measure the far vision power
C	Geometrical center
	Area to measure the prismatic power
D	Area to measure the near vision power
E	Addition
F	Inset (0.0 to 5.0 mm at 0.1 mm steps)
G	Identification and location mark