
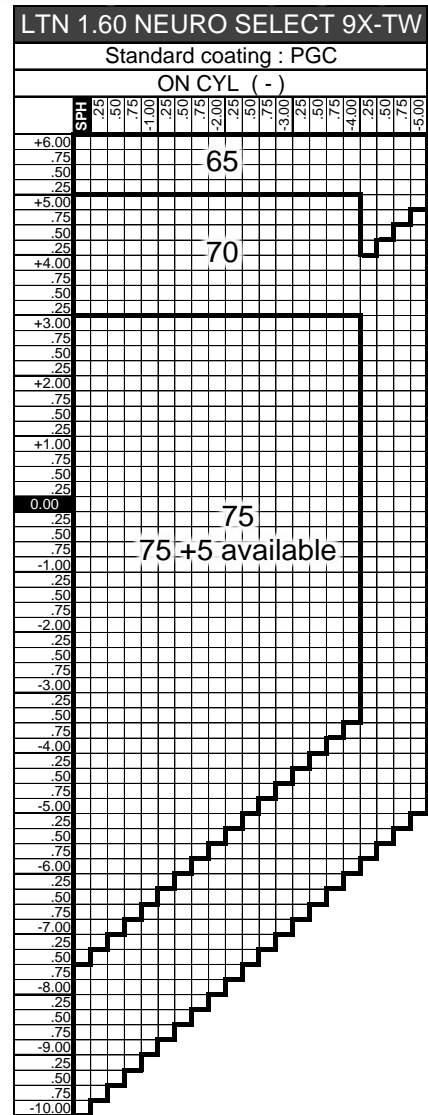
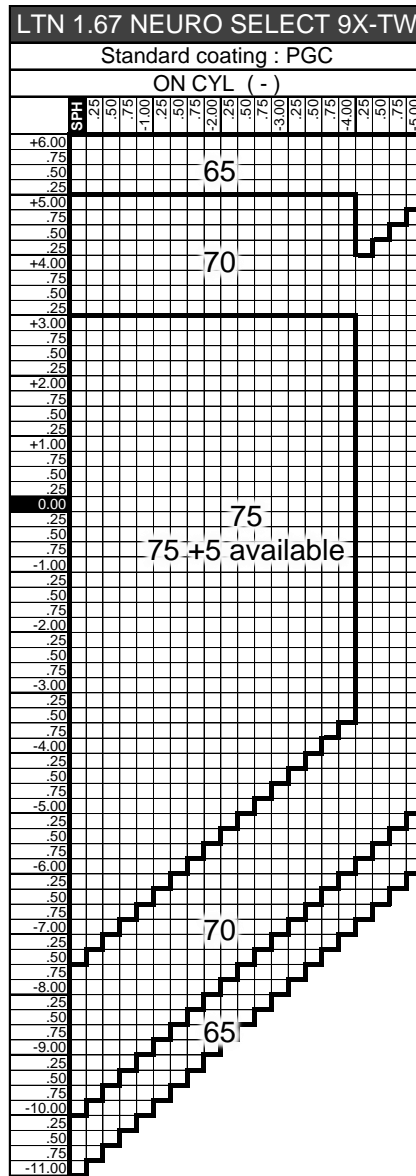


※The lens may be a cataract lens depending on the power

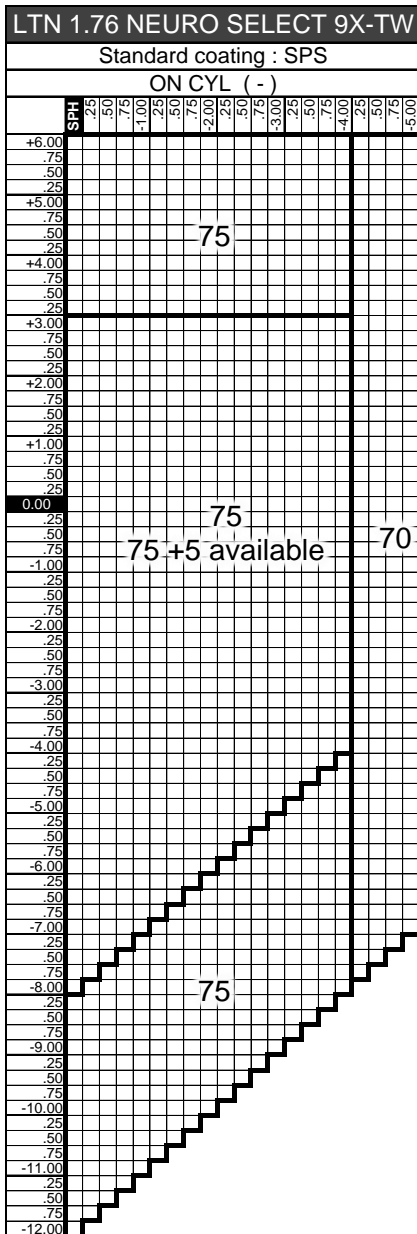

Corridor	11,12,13mm
Addition	0.50D to 4.00D at 0.25 steps
Design type	Mild, Clear, New Balance, Wide


Color Name	Category Number	Visible Transmittance (%)	Capability for Driving	Capability for Driving at Night
LUTINA Photochromic Brown	0/2	30/23	○	○
LUTINA Photochromic Gray	0/3	90/15	○	○

Frame shape information must be required.

Individual parameters	Specifications	Specifiable range / Availability
Wrap angle (Default value: 0.0°)	Wrap angle	0.0° ~ 15.0° (0.1° steps)
Tilt angle (Default value: 8.0°)	Tilt angle	-5.0° ~ 25.0° (0.1° steps)
Vertex distance (Default value: 12.0mm)	Vertex distance	8.0mm ~ 25.0mm (0.1mm steps)

Inset	Specifications	Specifiable range / Availability
Inset	Inset design from other elements	0.0 to 5.0 mm at 0.1 mm steps
Reading distance	Reading distance can be prescribed	Designed by far PD, power, reading distance, wrap angle, tilt angle and vertex distance

Specifications	Specifiable range / Availability
Size reduction	by 50mm Min : only (+), 1mm step
Prism	Up to 3 prism
Decentration	Not available
Base curve selection	Available
Slice (Frame shape required)	Available for plus & mixed power lenses
Remote edging	Available
Fine edge processing	Available (Less S+C = -3.00 : Not available)

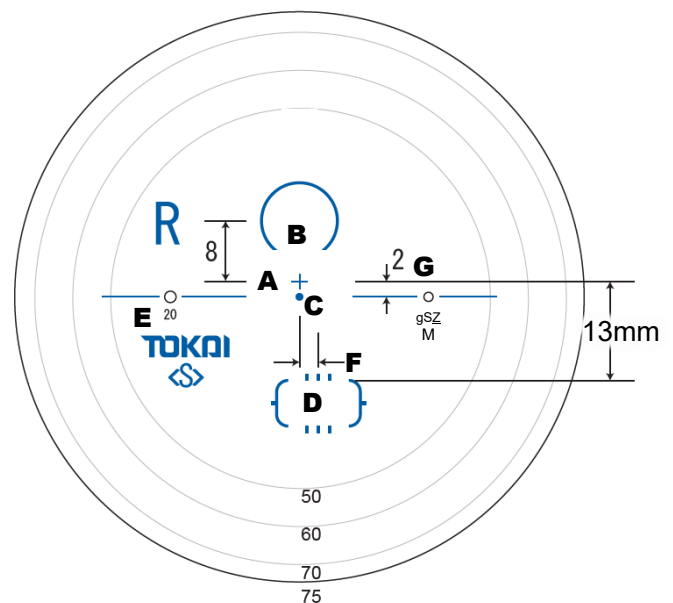

Product mark	Corridor	Index	Type
g	N 11mm	Z 1.76	M Mild
	T 12mm	U 1.67	C Clear
	S 13mm	E 1.60	N New Balance
		W	Wide

Lens mark
A Fitting point (far vision eye point)
B Area to measure the far vision power
C Geometrical center
D Area to measure the near vision power
E Addition
F Inset (0.0 to 5.0 mm at 0.1 mm steps)
G Identification and location mark