
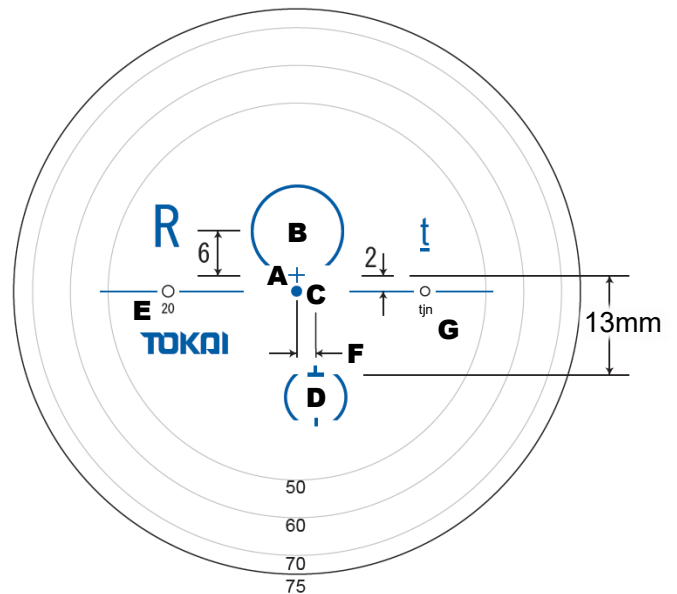
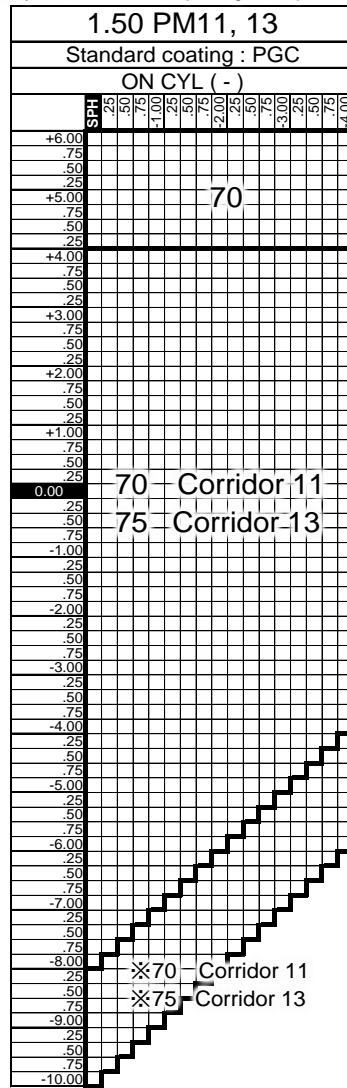
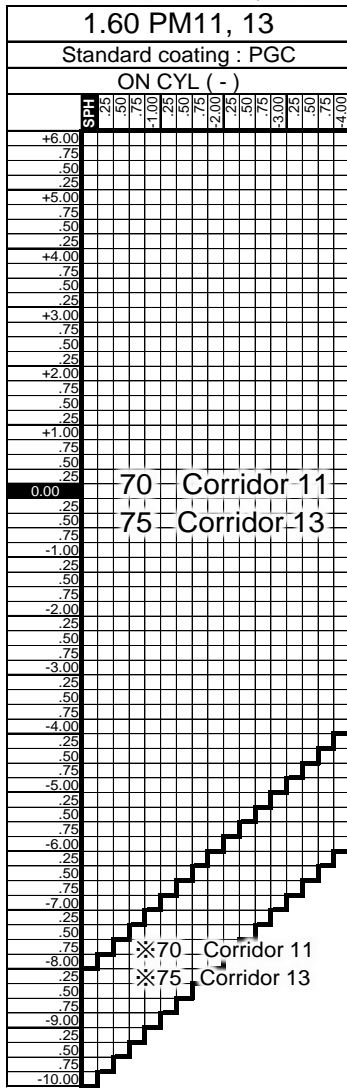


# PM11, PM13

※ In case of with prism, the lens may be a cataract lens depending on the power

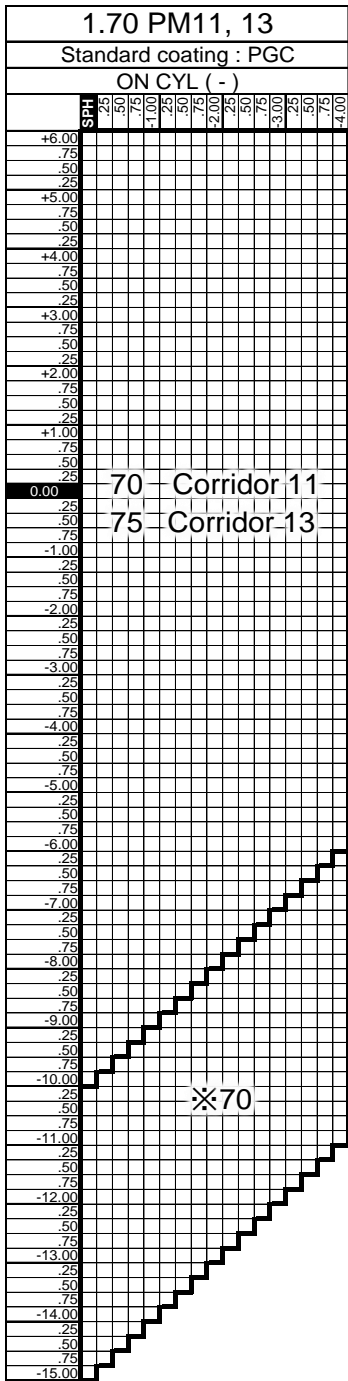

Specifications	Specifiable range / Availability	
Prescription	Size reduction	by 50mm Min : only (+), 1mm step
	Prism	Up to 3 prism
	Decentration	Not available
	Base curve selection	Not available
Progressive	Corridor	11, 13mm
	Addition	0.50D to 3.50D at 0.25 steps
	Variable inset design	Established inset designed based on power range
Frame data	Slice (Frame shape required)	Available for plus & mixed power lenses

Corridor	Paint mark
11mm	I
13mm	t

Index	Mark 11mm	Mark 13mm
1.70	TJN	tjn
1.60	THN	thn
1.50	TCN	tcn

Lens mark	
A	Fitting point (far vision eye point)
B	Area to measure the far vision power
C	Geometrical center
D	Area to measure the near vision power
E	Addition
F	Inset (0.0 to 5.0 mm at 0.1 mm steps)
G	Identification and location mark