Double-side progressive + Double-side aspheric design

RESONAS WS

※The lens may be a cataract lens depending on the power

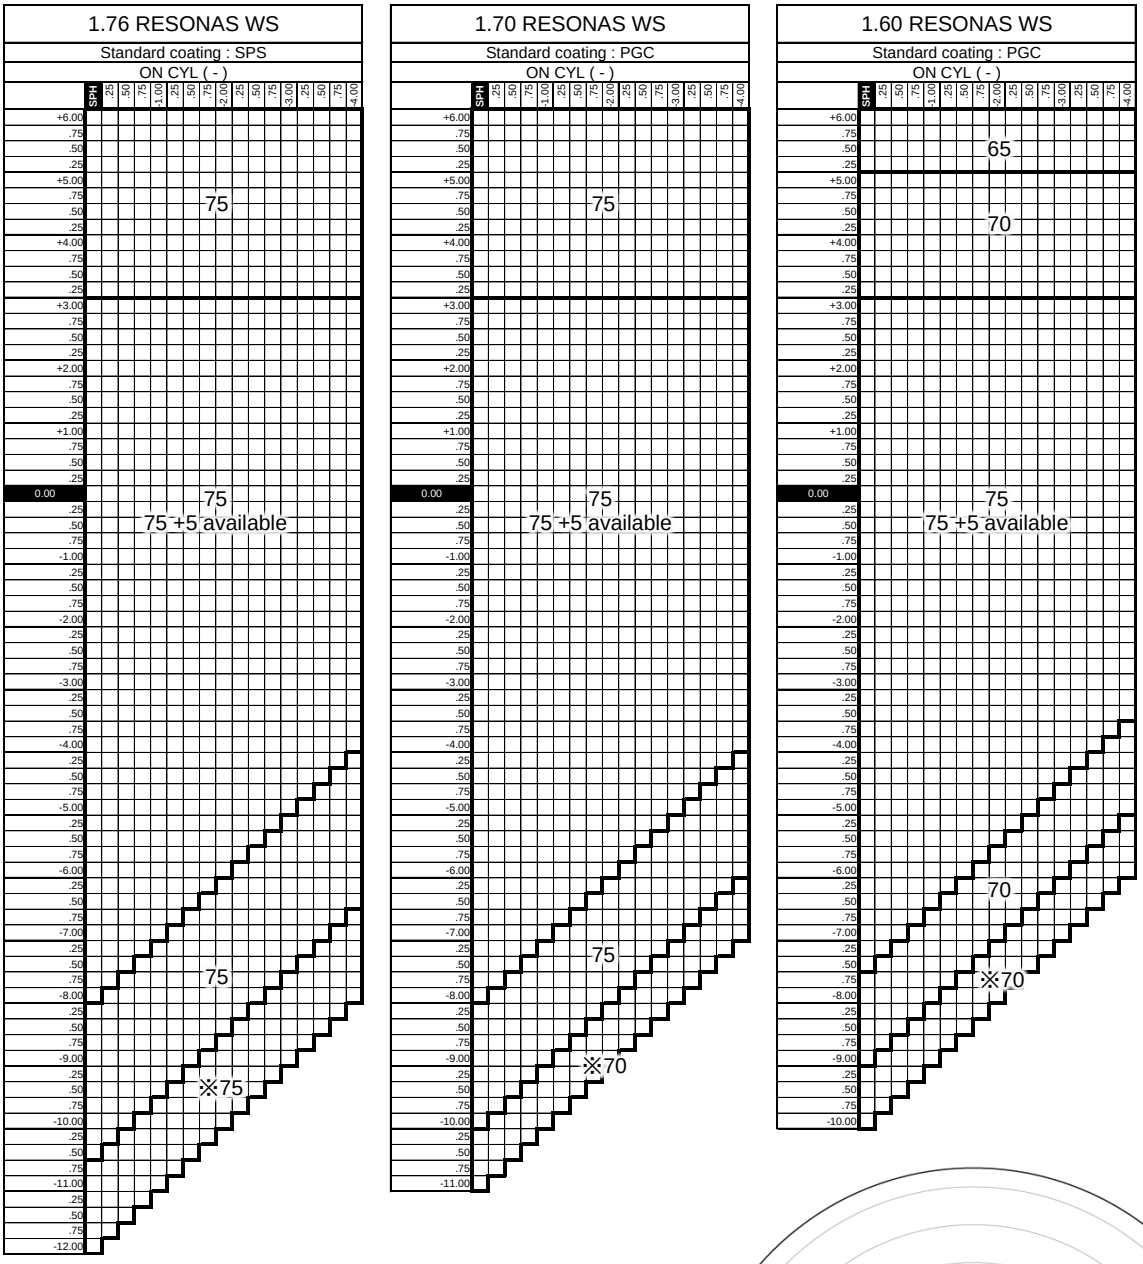

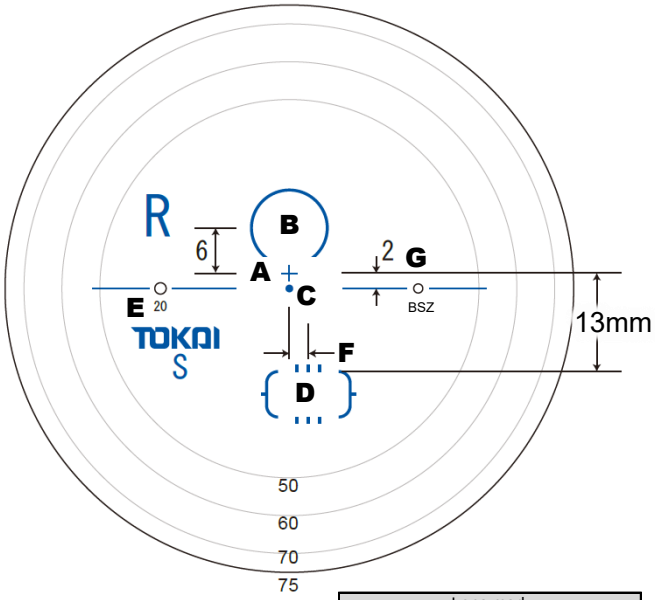

Specifications		Specifiable range / Availability
Prescription	Size reduction	by 50mm Min : only (+), 1mm step
	Prism	Up to 3 prism
	Decentration	Not available
	Base curve selection	Not available
Progressive	Corridor	11,12,13,14,15mm
	Addition	0.50D to 4.00D at 0.25 steps
	Inset	0.0 to 5.0 mm at 0.1 mm steps
	Inset design from other elements	Designed by far PD, power, reading distance,
	Reading distance can be prescribed	25cm to 80cm at 1cm steps
Frame data	Slice (Frame shape required)	Available for plus & mixed power lenses
	Mytune design	Available
	Fine edge processing	Available (Less S+C = -3.00 :Not available)

Product mark		Corridor		Index	
B		N	11mm	Z	1.76
MT	B	T	12mm	U	1.67
		S	13mm	6	1.60
		E	14mm		
		R	15mm		

Lens mark
A Fitting point (far vision eye point)
B Area to measure the far vision power
C Geometrical center
D Area to measure the near vision power
E Addition
F Inset (0.0 to 5.0 mm at 0.1 mm steps)
G Identification and location mark

TOKAI OPTICAL CO.,LTD.

2020.7