


TR NEURO SELECT 7X-DL / TR NEURO SELECT 7X-TW TR NEURO SELECT 7X-HM

TR GY & BR

Double-side progressive + Double-side aspheric design

※The lens may be a cataract lens depending on the power

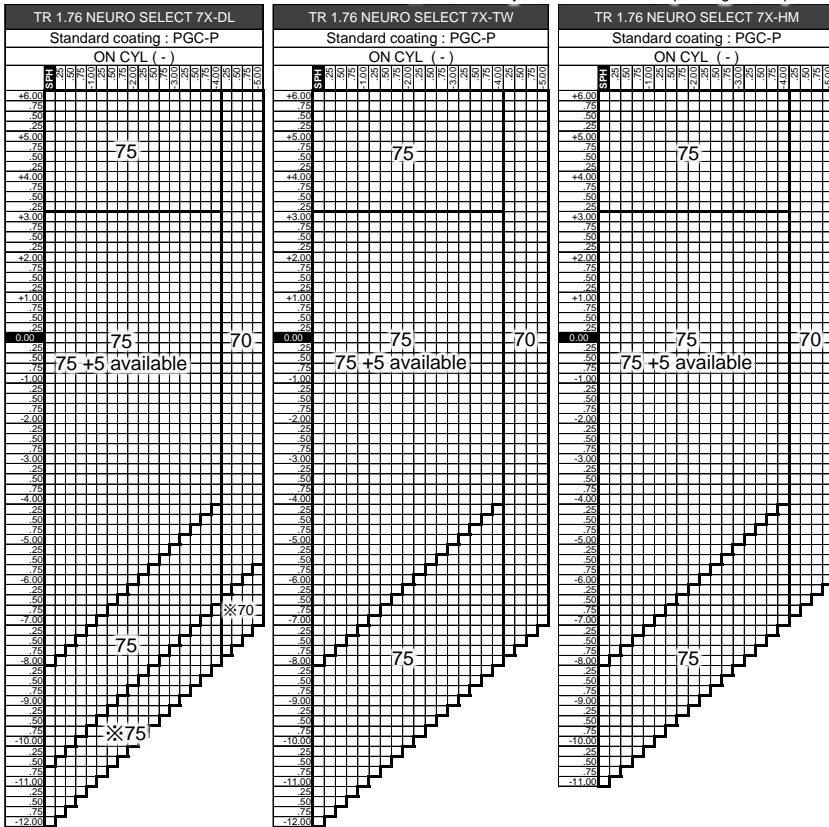

DL

Corridor	11,12,13,14,15mm
Addition	0.50D to 4.00D at 0.25 steps

TW

Corridor	11,12,13mm
Addition	0.50D to 4.00D at 0.25 steps

HM

Corridor	21,22,23mm
Addition	1.00D to 3.50D at 0.25 steps

TR NEURO SELECT 7X-DL

Product mark	Corridor	Index	Type
N	N 11mm	Z 1.76	M Mid
Δ (MT)	T 12mm		C Clear
N (I)	S 13mm		
Δ (MTI)	E 14mm		
	R 15mm		



TR NEURO SELECT 7X-TW

Product mark	Corridor	Index	Type
n	N 11mm	Z 1.76	M Mid
Δ (MT)	T 12mm		C Clear
n (I)	S 13mm		
Δ (MTI)			

TR NEURO SELECT 7X-HM

Design type	Corridor	Index	Design type
w Wide	L 21mm	Z 1.76	M Mid
ℓ Long	I 22mm		C Clear
w Wide (MT)	H 23mm		
ℓ Long (MT)			
w Wide (I)			
ℓ Long (I)			
w Wide (MTI)			
ℓ Long (MTI)			

Lens mark	
A	Fitting point (far vision eye point)
B	Area to measure the far vision power
C	Geometrical center
D	Area to measure the near vision power
E	Addition
F	Inset (0.0 to 5.0 mm at 0.1 mm steps)
G	Identification and location mark

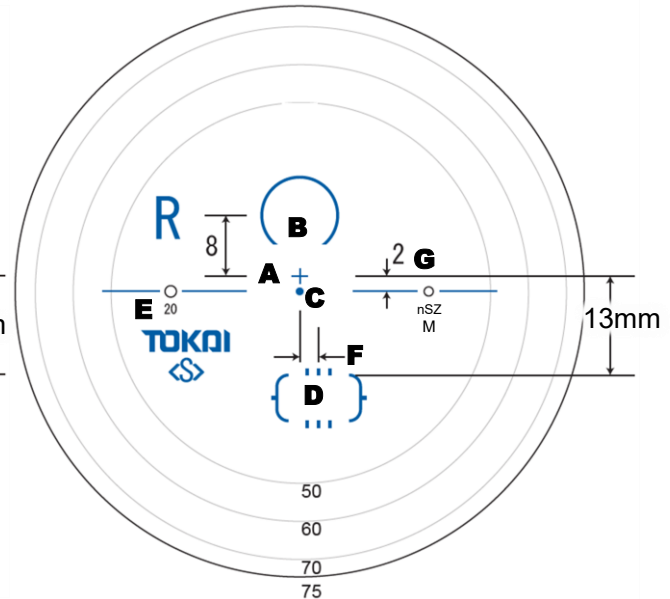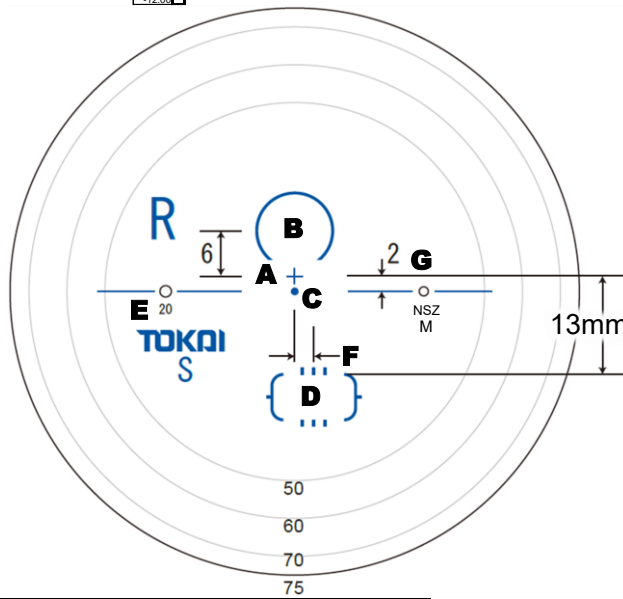

Color Name	Category Number	Visible Transmittance (%)	Capability for Driving	Capability for Driving at Night
PL Photochromic Brown (TR8)	0/3	93/16	○	○
PL Photochromic Gray (TR9)	0/3	92/12	○	○

Option for MT, I, MTI		
MT	Mytune	Frame shape information required.
i	Individual	Individual parameters can be specified.
MTI	Mytune & Individual	Frame shape information required. Individual parameters can be specified.
Individual parameters	Wrap angle (Default value: 0.0°)	0.0° ~ 15.0° (0.1° steps)
	Tilt angle (Default value: 8.0°)	-5.0° ~ 25.0° (0.1° steps)
	Vertex distance (Default value: 12.0mm)	8.0mm ~ 25.0mm (0.1mm steps)

Inset	Inset	0.0 to 5.0 mm at 0.1 mm steps
	Inset design from other elements	Designed by far PD, power, reading distance, wrap angle, tilt angle and vertex distance
Reading distance	Reading distance can be prescribed	25cm to 80cm at 1cm steps

Specifications		Specifiable range / Availability	
Prescription	Size reduction	by 50mm Min : only (+), 1mm step	
	Prism	Up to 3 prism	
	Decentration	Not available	
	Base curve selection	Available	
Frame data	Slice (Frame shape required)	Available for plus & mixed power lenses	
	Remote edging	Available	
	Fine edge processing	Available (Less S+C = -3.00 : Not available)	

